
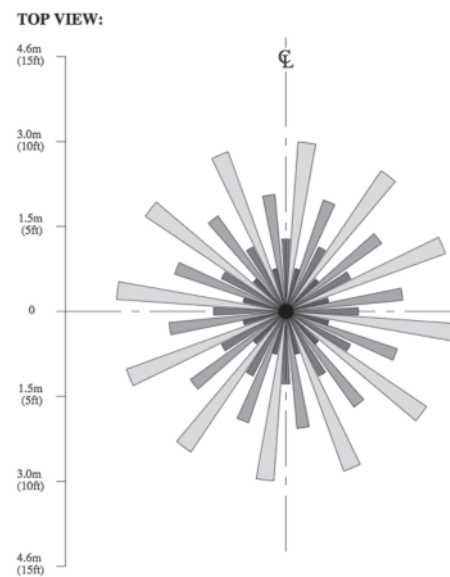


Fixture Mount PIR High Bay/Low Bay Dimming Occupancy Sensor

KEY FEATURES

- Adjustable 0-100% continuous dimming control
- Specifically designed for LED fixture control
- Suitable for use in warehouse, manufacturing and indoor parking garages
- Interchangeable 360° high-bay and low-bay lenses included
- Adjustable time delay
- Fast & Easy Installation using standard 1/2" knockouts and pre-stripped 18" color-coded wire leads
- H.I.S. (High Inrush Stability) Technology
- Zero Crossing Circuitry, Relay uses zero-crossing circuitry to provide reliable, long-life operation
- Relay always returns to closed after power loss event
- UL listed for electronic ballast loads 120/277V
- Complies with all requirements of ASHRAE 90.1

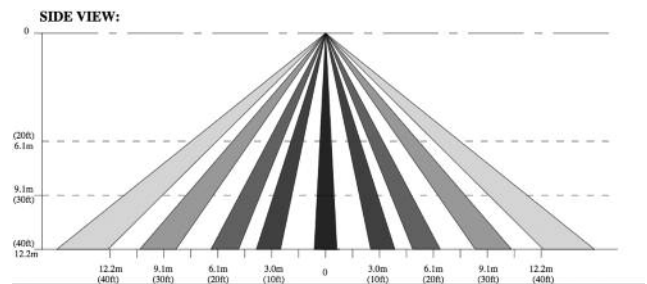

GridNavigator